



河北雄安盛蕴科技有限公司
HEBEI XIONGAN SHARE TECHNOLOGY CO., LTD.

品类齐全
质量可靠
服务周到

河北雄安盛蕴科技有限公司
Hebei Xiongan Share Technology Co., Ltd.

Website: www.cnsharetech.com
Email: sales@cnsharetech.com
cnsharetech@gmail.com
WhatsApp: +86 17631567827



WhatsApp



WeChat



Telegram



中国·雄安

About us

Hebei XiongAn Share Technology Co., Ltd. is located in Baoding China. Being a leading manufacturer, supplier and exporter in lifting and handling industry and construction machinery industry, we provide a widely variety of solutions for our customers' needs, whether for the standard materials or special designs. We promise offering the highest quality products and providing the best possible service and supports to our customers.

Our Vision:

- Make handling easier!

Our Mission:

- To know the real needs of customer,
- To provide the best solutions of customer,
- To create sustainable development for customer.

Our Values:



- Customers are friends,
- Employees are family,
- Suppliers are brothers.

Our Concept:

- Strictly Quality Control;
- Satisfied Customer Service;
- Full Range products.



ABOUT US

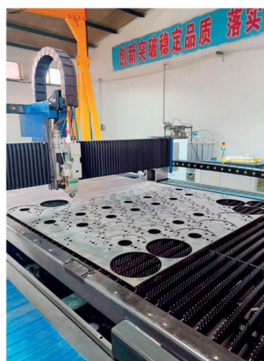

CATALOGUE

材料装卸设备 MATERIAL HANDLING EQUIPMENT

- 1 液压叉车 Manual Hydraulic Forklift
- 2 带称手动搬运车 Manual Pallet Truck With Scale
- 3 半电动搬运车 Semi-Electric Pallet Truck
- 4 全电动搬运车 Full Electric Pallet Truck
- 5 半电动越野搬运车 Semi-Electric Off-Road Pallet Truck
- 6 堆高车 Manual Stacker
- 7 半电动堆高车 Semi-Electric Stacker
- 8 电动堆高车 Electric Stacker
- 9 全电动步行式堆高车 Full electric Walkie Stacker
- 10 全电动站立式堆高车 Stand-Drive Electric Stacker
- 11 移动式平台小车 Hydraulic Scissors Lifting Table
- 12 坦克搬运车 Tank Cargo Trolley

起重机械 HOISTING MACHINERY

- 13 HHB 环链电动葫芦 HHB Electric Chain Hoist
- 15 DHS 电动环链葫芦 DHS electric chain hoist
- 16 HSZ-T 手拉葫芦 HSZ-T Manual Chain Hoist
- 17 HSC 手拉葫芦 HSC Manual Chain Hoist
- 18 VT 手拉葫芦 Chain Hoist
- 19 HSH 手扳葫芦 HSH Manual Lever Block
- 19 HSH-VT 手扳葫芦 HSH-VT Lever Block
- 20 轨道跑车 Hoist trolley
- 21 轨道跑车 Electric Hoist Trolley
- 22 便携式牵引葫芦 Portable Electric Hoist
- 23 DK 悬挂式钢丝绳便携升降器 (新款双孔小金刚 / 大金刚) DK Mini Electric Cable Puller
- 24 PA 微型电动钢丝绳葫芦 PA Mini Electric Wire Rope Hoist
- 25 BCD 电动提升机 BCD Electric Hoist Winch
- 27 CD MD 电动钢丝绳葫芦 CD MD Electric Wire Rope Hoist
- 29 LCD LMD 低净空电动钢丝绳葫芦 LCD LMD Low Headroom Electric Wire Rope Hoist
- 30 一字卷扬机 Slotted Winch
- 31 JK 电动卷扬机 JK Electric Windlass
- 32 多功能钢丝绳紧线器 Ratchet Cable Puller
- 33 NSX 型钢丝绳手扳葫芦 NSX Type Steel Wire Rope Hoist
- 34 NST 型钢丝绳手扳葫芦 NST Type Steel Wire Rope Hoist

起重机械 HOISTING MACHINERY

- 35 HBSQ-K 型防爆手拉葫芦 HBSQ-K Explosion-Proof Chain Hoist
- 36 HBSQ 型防爆手拉葫芦 HBSQ Explosion-Proof Chain Hoist
- 37 DHBY 型防爆环链电动葫芦 DHBY Explosion-Proof Electric Chain Hoist
- 38 GCBL 防爆手拉跑车 GCBL Explosion-Proof Geared Trolley
- 38 GCBT 防爆手推跑车 GCBT Explosion-Proof Plain Trolley
- 39 HSZ-K 型不锈钢手拉葫芦 HSZ-K Stainless Steel Chain Hoist
- 40 HSZ-B 型不锈钢手拉葫芦 HSZ-B Stainless Steel Chain Hoist
- 41 FKS 铝合金手拉葫芦 FKS Aluminum Alloy Chain Hoist
- 42 铝合金手扳葫芦 Aluminum Alloy Lever Block

索具和吊索 SLINGS AND RIGGINGS

- 43 EA 双眼圆形吊装带 EA Double Eyes Round Webbing Sling
- 44 EA 圆形吊装带 EA Endless Round Webbing Sling
- 45 EB 扁平吊装带 EB Endless Flat Webbing Sling
- 46 EB 双眼扁平吊装带 EB Double Eyes Flat Webbing Sling
- 46 吊带拉紧器 Webbing Ratchet
- 47 G80 起重链条 G80 Lifting Chains
- 48 G80 卸扣 G80 shackle
- 49 G80 吊钩 吊环 G80 Lifting Hook & Links
- 58 组合索具 Lifting Chain Sling
- 59 G80 花兰 G80 Turnbuckles
- 60 单轮开口滑车 Single Wheel Pulley With Hook
- 60 单轮吊环滑车 Single Wheel Pulley With Ring
- 61 多轮吊钩滑车 Multi Wheels Pulley With Hook
- 61 多轮吊环滑车 Multi Wheels Pulley With Ring
- 62 单轮吊环电力滑车 Single-Wheel Lifting Ring Electric Pulley

**MATERIAL
HANDLING
EQUIPMENT**



● 液压叉车 Manual Hydraulic Forklift

● 带称手动搬运车 Manual Pallet Truck With Scale



1. Overall Beating Structure 整体油缸，防漏油，性能更好
2. Daul Silence Wheel, Long Service Life 双静音轮更耐磨
3. Rubber Coated Handle, Skidproof 包胶手柄，防滑 抗疲劳

Product Parameters

产品规格 Product Specification	额定起重能力 Rated Lifting Capacity	最低限度叉的高度 Minimum Height of Fork	叉的最大高度 Maximum Height of Fork	有效的叉的长度 Effective length of fork	内叉的宽度 Inside Width of Fork	外面的叉的宽度 Outer Width of Fork	重量 Net Weight
2Ton 550*1150	2000kg	85mm	200mm	1150mm	230mm	550mm	57kg
2Ton 685*1220	2000kg	85mm	200mm	1220mm	325mm	685mm	67kg
2.5Ton 550*1150	2500kg	85mm	200mm	1150mm	230mm	550mm	57kg
6.5Ton 685*1220	2500kg	85mm	200mm	1220mm	325mm	685mm	67kg
3Ton 550*1150	3000kg	85mm	200mm	1150mm	230mm	550mm	70kg
8Ton 685*1220	3000kg	85mm	200mm	1220mm	325mm	685mm	80kg
3.5Ton 550*1150	3000kg	85mm	200mm	1150mm	230mm	550mm	70kg
3.5Ton 685*1220	3000kg	85mm	200mm	1220mm	325mm	685mm	80kg
5Ton 550*1150	5000kg	85mm	200mm	1150mm	190mm	550mm	140kg
5Ton 685*1220	5000kg	85mm	200mm	1150mm	325mm	685mm	150kg



Clear digital display Easy to read
清晰的数字显示，易于阅读



Prevent oil leakage Good safety
防止漏油，安全性好



Rubber handle comfortable and non-slip
橡胶手柄舒适防滑



Thickened steel plate
加厚钢板

Product Parameters

NO.	最低限度叉的高度 Minimum Height of Fork	叉的最大高度 Maximum Height of Fork	有效的叉的长度 Effective length of fork	叉的宽度 Width of Fork	额定起重能力 Rated Lifting Capacity
685	85mm	190mm	1155mm	160 mm	2000kg
550	85mm	195mm	1155mm	160 mm	2000kg
685	85mm	190mm	1155mm	160 mm	2000kg
550	85mm	195mm	1155mm	160 mm	2000kg

● 半电动搬运车 Semi-Electric Pallet Truck



Simple structure, reliable, safety
结构简单、可靠、安全



Excellent stable chassis configuration
底盘配置优良稳定



Sturdy all-iron body
坚固的全铁车身

Product Parameters

产品型号 Product Code	SY-SE520-3-550	SY-SE520-3-685	SY-ES20-2-685	SY-ES20-2-550
电池类型 Battery Type	Lead Acid Battery	Lead Acid Battery	Lead Acid Battery	Lead Acid Battery
电池容量 Battery Capacity	48V20Ah	48V20Ah	48V20Ah	48V20Ah
行驶速度 Travel Speed	5km/h	5km/h	5km/h	5km/h
电池使用时长 Battery Ampere hours	6h	6h	6h	6h
无刷永磁电机 Brushless Permanent Magnet Motor	800W	800W	800W	800W
负载能力 Load Capacity(kg)	3000kg	3000kg	2000kg	2000kg
框架尺寸 Frame Sizes (mm)	550*1200	685*1200	550*1200	685*1200
叉长 Fork Length(mm)	1200mm	1200mm	1200mm	1200mm
最小叉高 Min Fork Height(mm)	70mm	70mm	70mm	70mm
最大叉高 Max Fork Height(mm)	200mm	200mm	200mm	200mm
重量 Dead Weight(kg)	150kg	155Kg	175kg	170Kg

● 全电动搬运车 Full Electric Pallet Truck



Integrated casting hydraulic oil pump,
35mm strong hydraulic Rod support
集成铸造液压油泵, 35mm 强液压杆
支撑



High-power brushless motor, double
driver.
大功率无刷电机, 双驱动器。



Smart and flexible operation.
智能灵活的操作。

Product Parameters

产品 Product	全电动搬运车 Electric pallet truck Electric
额定起重 Rated Lifting Capacity	2T
规格 specification(mm)	685*1200
叉的长度 Length of the fork (mm)	1200
电池容量 Battery capacity	48V20Ah
行驶速度 Speed	5km/h
重量 Weight	155
电池类型 Battery type	Lead-acid battery

● 半电动越野搬运车 Semi-Electric Off-Road



Equipped with 350x100mm solid tire large size wheel foot to provide better pass ability all solid tire, anti-skid wear stronger grip.

配备350x100mm实心轮胎大尺寸车轮脚。提供更好的通过能力，所有实心轮胎，防滑磨损更强的抓地力。



The keys are simple and clear the integrated functions are complete, and the operation is easier to use;

按键简单、清晰，集成功能齐全，操作使用方便；

Product Parameters

额定起重 Rated Lifting Capacity	3T
规格 specification(mm)	685*1200
叉的长度 Length of the fork (mm)	1200
电池容量 Battery capacity	48V20Ah
行驶速度 Speed	5km/h
重量 Weight	160
电池类型 Battery type	Lead-acid battery

● 堆高车 Manual Stacker



Reinforced Chains
强化加固链条



Powerful Front Fork
前叉动力十足



Durable Oil Cylinder
优质液压缸



Wear-Resistant Nylon Wheels
Better Bearing
耐磨尼龙滑轮

Product Parameters

产品规格 Product Specification	额定起重重量 Rated Lifting Capacity	最低限度 叉的高度 Minimum Height of fork	叉的最大高度 Maximum Height of fork	有效的 叉的长度 Effective Length of fork	内叉的宽度 Inside Width of fork	外面的 叉的宽度 Outer Width of fork	重量 Net Weight
2Ton 550*1150	2000kg	85mm	200mm	1150mm	230mm	550mm	57kg
2Ton 685*1220	2000kg	85mm	200mm	1220mm	325mm	685mm	67kg
2.5Ton 550*1150	2500kg	85mm	200mm	1150mm	230mm	550mm	57kg
2.5Ton 685*1220	2500kg	85mm	200mm	1220mm	325mm	685mm	67kg
3Ton 550*1150	3000kg	85mm	200mm	1150mm	230mm	550mm	70kg
3Ton 685*1220	3000kg	85mm	200mm	1000mm	325mm	760mm	80kg
3.5Ton 550*1150	3000kg	85mm	200mm	1150mm	230mm	550mm	70kg
3.5Ton 685*1220	3000kg	85mm	200mm	1220mm	325mm	685mm	80kg
5Ton 550*1150	5000kg	85mm	200mm	1150mm	190mm	550mm	140kg
5Ton 685*1220	5000kg	85mm	200mm	1150mm	325mm	685mm	150kg

★ Never exceed Working Load Limit

● 半电动堆高车 Semi-Electric Stacker



Multi-function meter
多功能仪表盘



Anti burst cylinder
防爆气缸



Lead-acid cell
铅酸电池

Product Parameters

产品 Product	型号 Model	材料 Material	提升高度 Lifting height (mm)	额定起 重高度 Rated Lifting Height (kg)	分叉有 效长度 Effective Length of fork(mm)	最大分 叉宽度 Maximum fork width (mm)	有效叉长 Effective leg length (mm)	距地面高度 Height from the ground (mm)	全长 Overall length (mm)	全长 Net weight (KG)
Semi-Electric Stacker	YAVI-E-SES2T*1.6M	12#C-shaped steel	1550		1000	968	900	75	1680	
	YAVI-E-SES2T*2M	12#C-shaped steel	2080		1000	968	900	75	1680	364
	YAVI-E-SES2T*2.5M	12#C-shaped steel	2500	2000	1000	968	900	75	1810	396
	YAVI-E-SES2T*3M	12#C-shaped steel	3000	2000	1000	968	900	75	1810	419.5

● 电动堆高车 Electric Stacker



Strong input power and efficient operation
输入功率强，运行高效



Nylon/PU wheel can be rotated for 360 degree
尼龙/PU轮可旋转360度



Thickened steel is strong and durable
增厚钢坚固耐用

Product Parameters

型号 Model	额定负荷 Rated load	起重高度 Lifting height	叉长度 Fork length (mm)	叉宽度 Fork width (mm)	尺寸 size(mm)			前/后轮直径 Front/ back wheel dia	NW
					L	W	H		
SY-ES-01CH	1T	1.6m	840	100	1350	705	2080	50*90mm /50*180 mm	≈137kg
SY-ES-01C	1T	1.6m	1000	140	1580	890	2100		≈167kg
SY-ES-02C	2T	1.6m	1000	140	1580	890	2100		≈190kg
SY-ES-02I	2T	1.6m	830	120	1410	702	2090		≈175kg
SY-ES-03I	3T	1.6m	1000	140	1250	800	2110		≈252.5kg

● 全电动步行式堆高车 Full electric Walkie Stacker

● 全电动站立式堆高车 Stand-Drive Electric Stacker



The multi-function meter can display the vehicle working status, battery power and working time.
多功能仪表可以显示车辆的工作状态、电池功率和工作时间。




With emergency reverse button and turtle low speed switch to enhance the safety of operation.
采用紧急倒车按钮和龟低速开关，提高操作安全性。

产品 Product	型号 Model	材料 Material	提升高度 Lifting height (mm)	分叉有效长度 Effective Length of fork(mm)	最大分叉宽度 Maximum fork width (mm)
Full electric Walkie Stacker	YAVI-E-WS2T*1.6M	12#C-shaped steel	1550	1000	970
	YAVI-E-WS2T*2M	12#C-shaped steel	2080	1000	970
	YAVI-E-WS2T*2.5M	12#C-shaped steel	2630	1000	970
	YAVI-E-WS2T*3M	12#C-shaped steel	2830	1000	970



Large capacity battery, long battery life and easy replacement
电池容量大，电池寿命长，更换方便



Integral forming thickened integral fork stronger load bearing and less wear and deformation
高质量的加厚钢，高钢比，更耐用



wear-resistant, non-inflation, silent shock absorption
耐磨，无压痕，无声减震性能

Product Parameters

● 移动式平台小车 Hydraulic Scissors Lifting Table



Product Parameters

型号 Model	FAB 150	FAC 150	FAC 200	FAB 350	FAB 500	FAC 300	FAC 500
额定承载重量 Load capacity (Kg)	150	150	200	350	500	300	500
起升进程 Max. Lifting height mm/per time	20	20	20	20	20	20	20
平台最高高度 H Max. heighest Height (Mm)	720	1220	2000	900	900	1500	1500
平台最低高度 G Min. Lowest Heightm (Mm)	210	302	410	280	280	350	400
工作台尺寸 L×B Dimensions of Table (Mm)	700×450	700×450	925×665	820×500	820×500	920×500	920×500
把手高度 Height of Handle (Mm)	730	730	960	960	960	960	960
油缸规格 Oil Cylinder	G75-32: 18		G75-32: 14				
油缸压杆长度 Length of Cylinder Pressure Rod (Mm)	260	260	260	260	300	260	300
定向行走轮直径 φ Diameter of Directional Wheel (Mm)	100	100	125	125	125	125	125
转向轮直径 φ Diameter of Steering Wheel (Mm)	100	100	125	125	125	125	125
车身长度 Length (Mm)	780	780	980	880	880	980	980
整车自重 Net. Weight (Kg)	45	50	137	69	72	99	102

● 坦克搬运车 Tank Cargo Trolley




型号 Model	CRA-6	CRA-8	CRA-12	CRA-15	CRA-18	CRA-24	CRA-30	CRA-40
长宽高 Length, Width and Height(Mm)	300*215*110	395*215*110	475*220*110	380*300*110	475*300*110	490*390*110	590*390*110	590*480*110
最大载荷 Maximum Load(T)	6	8	12	15	18	24	30	36
正常载荷 Normal Load(T)	4	6	8	9	12	16	20	25
轮子数量 Number of Wheels(N)	4	6	8	9	12	16	20	25
产品重量 Product Weight(Kg)	11.5	16.5	22	24	31	45	63	70
轮子材质 Wheel Material	PU	PU	PU	PU	PU	PU	PU	PU



HOISTING MACHINERY




● HHB 环链电动葫芦 HHB Electric Chain Hoist

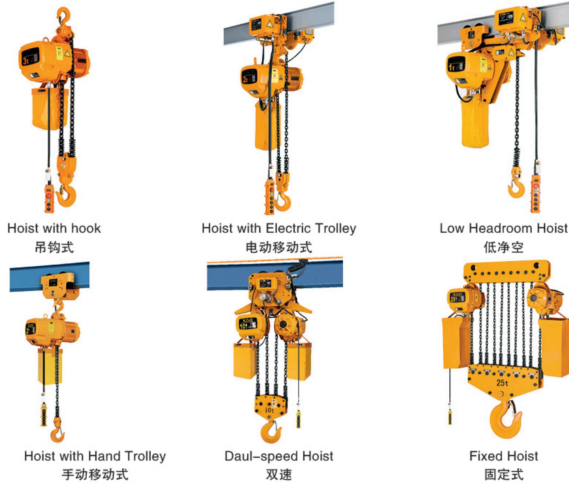


Product Parameters

额定起重容量 Rated Lifting Capacity (T)	0.5T	1T	1T	2T	2T	3T	3T	3T	5T	7.5T	10T
规格和模型 Specification And Model (3m)	0.5-1	1-1	1-2	2-1	2-2	3-1	3-2	3-3	5-2	7.5-3	10-4
权力电源电压 Power Supply Voltage (V)	380	380	380	380	380	380	380	380	380	380	380
频率 Frequency (Hz)	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
提升速度 Lifting Speed (M/min)	7.2	6.8	3.6	6.6	3.4	5.6	3.3	2.2	2.8	1.8	2.8
操作速度 Operating Speed (M/min)	11/1	11/1	11/1	11/1	11/1	11/1	11/1	11/1	11/1	11/1	11/1
链条规格 Chain Specification	Medium 6.3	Medium 7.1	Medium 6.3	Medium 10	Medium 7.1	Medium 11.2	Medium 7.1	Medium 10	Medium 11.2	Medium 11.2	Medium 11.2
工字梁梁口型号 I-beam Sprue Model (Mm)	75-125	68-153	68-153	82-178	82-178	100-178	100-178	00-178	112-178	112-178	112-178

● HHB 环链电动葫芦 HHB Electric Chain Hoist

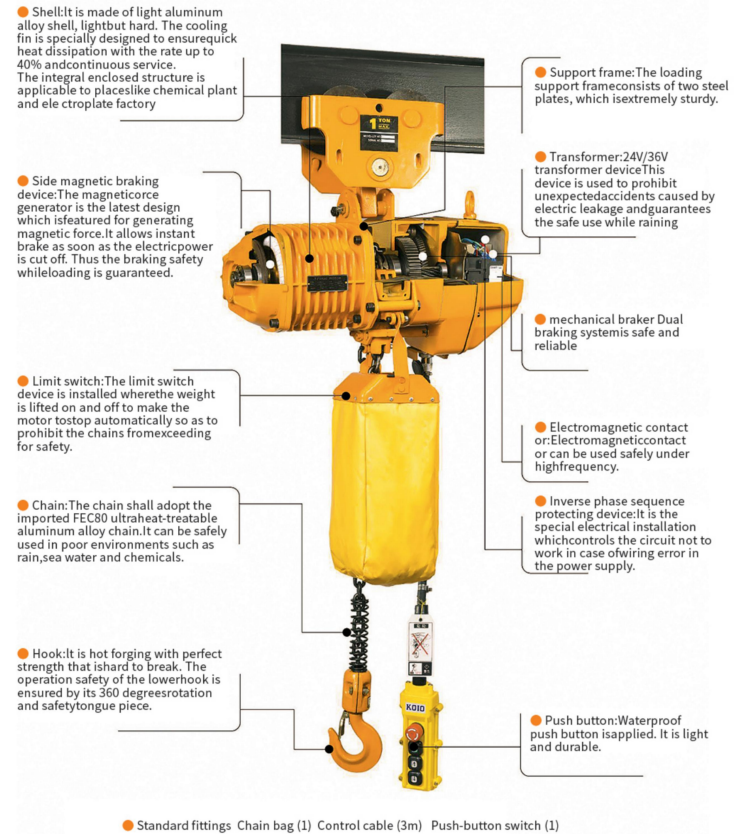

● DHS 电动葫芦 DHS Electric Chain Hoist

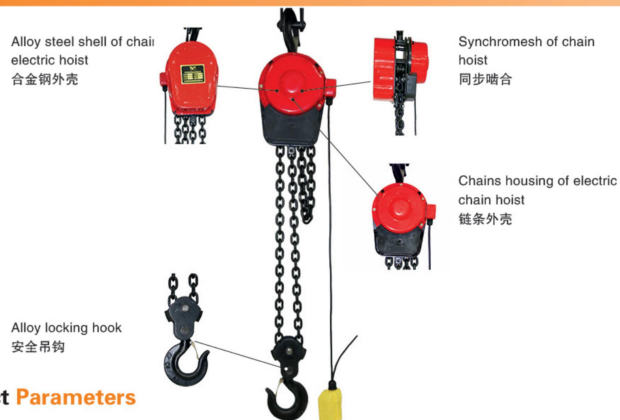

Product Parameters

产品型号 Product Model	DHS1	DHS2 (single chain)	DHS2 (double chain)	DHS3	DHS5	DHS10	DHS20
额定起重量 Rated Lifting Capacity (T)	1	2	2	3	5	10	20
试验载荷 Test Load	1.25	1.25	1.25	1.25	1.25	1.25	1.25
额定电压 Rated Voltage (V)	380	380	380	380	380	380	380
额定功率 Rated Power (W)	500	500	500	750	750	750	
提升速度 Lifting Speed (M/min)	2.25	1.85	1.85	1.1	0.9	0.45	0.45
标准提升高度 Standard Lifting Height (M)	3	3	3	3	3	3	3
链条直径 Chain Diameter (Mm)	6	6	6	8	10	10	10
电机型号 Disc Motor Model	YHPF 500-4	YHPF 750-4	YHPE 750-4	YHPF 500-4	YHPF 750-4	YHPE 750-4	YHPE 750-4
两个挂钩之间的最小距离 Minimum Distance Between Two Hooks (Mm)	270	380	380	470	600	700	1000
毛重 Gross Weight of Packing (Kg)	36	45	45	42	57	115	195
包装尺寸 Package Size (Cm)	50*32*28	50*32*20	52*32*30	52*32*30	60*32*32		

● HSZ-T 手拉葫芦 HSZ-T Manual Chain Hoist

- Tooth chain guide system, Reduce chain jamming rate during working process.
优质齿轮导向系统降低工作过程中卡链率
- Galvanized Chains, no maintenance, no rust
Promise long service life
镀锌链条, 免维护, 不生锈使用寿命更长



Product Parameters

产品型号 Product Model	HSZ-½	HSZ-1	HSZ-1½	HSZ-2	HSZ-3	HSZ-5	HSZ-10	HSZ-20
额定载荷 Capacity (T)	0.5	1	1.5	2	3	5	10	20
标准提升高度 Standard Lifting Height (m)	2.5	2.5	2.5	2.5	3	3	3	3
试验载荷 Test Load	2.5	1.25	2	2.5	3.75	6.25	12.5	25
两个挂钩之间的最小距离 Minimum Distance Between Two Hooks	270	270	368	444	483	616	700	1000
满载时的拉力 Bracelet Tension at Full Load	225	309	343	314	343	383	392	392
起重链条数量 Number of Lifting Chain Lines	1	1	1	2	2	2	4	8
链条直径 Diameter of Load Chain	6	6	8	6	8	10	10	10
净重 Net Weight	9.5	10	16	14	24	36	68	155
毛重 Packing Gross	12	13	20	17	28	45	83	193
包装尺寸 “长 x 宽 x 高” Packing Size “L x W x H”	28X21X17	30X24X18	34X29X20	33X25X19	38X30X20	45X35X24	62X50X28	70X46X75
额外重量 Extra Weight Melcr of Extra Lift	1.7	1.7	2.3	2.5	3.7	5.3	9.7	19.4

● HSC 手拉葫芦 HSC Manual Chain Hoist

● Alloy steel forged shell, fixed with three screw nuts. Beautiful, wear resistant, avoid falling off.
合金钢锻造外壳, 旋转螺钉配置美观, 耐磨, 不易脱落。

● Synchronous gear, chains moving smoothly, no stuck.
同步咬合齿轮, 链条运行平稳, 不卡链。

● Galvanized Chains, no maintenance, no rust. Promise long service life.
镀锌链条, 免维护, 不生锈使用寿命更长。



Product Parameters

规格 Specification Of Hoist	1 tons 3 meters	1 tons 6 meters	2 tons 3 meters	2 tons 6 meters	3 tons 3 meters	3 tons 6 meters	5 tons 3 meters	5 tons 6 meters
葫芦毛重 Gross Weight	7.5kg	11kg	11kg	18kg	20kg	30kg	34kg	43kg
附件材料 Accessories Material	manganese steel	manganese steel	manganese steel	manganese steel	manganese steel	manganese steel	manganese steel	manganese steel
链条直径 Chain Diameter	6mm	6mm	6mm	6mm	8mm	8mm	10mm	10mm
链条材料 Chain Material	GB G80	GB G80	GB G80	GB G80	GB G80	GB G80	GB G80	GB G80
链条长度 Chain Length	2.5M	5.6M	2.8M	5.6M	2.8M	5.6M	2.8M	5.6M
产品包装 Product Packaging	Wooden box	Wooden box	Wooden box	Wooden box	Wooden box	Wooden box	Wooden box	Wooden box

★ Never exceed Working Load Limit

● VT 手拉葫芦 Chain Hoist

● Tooth chain guide system.
Reduce chain jamming rate during working process.
优质齿轮导向系统降低工作过程中卡链率。

● Alloy steel forged shell, fixed with three screw nuts.
Beautiful wear resistant, avoid falling off.
合金钢锻造外壳, 旋转螺钉配置美观, 耐磨, 不易脱落。

● G80 alloy steel forged safety hook.
Ensure the strength, and concerned the user's safety.
G80 锻造合金钢安全吊钩抗拉强度高, 用户使用更安全。



Product Parameters

型号 Model	额定载荷 Capacity (Fall)	标准起 升高度 Standard Lifting Height (M)	起升时平 均手拉 Pulling Load	重物每提升 1m 时手拉 链条的牵引 距离 Extra Distance per Meter of Extra Lift	起重链条直 径 X 载距 Dia(Lifting Chain) X Intercept (Kg)	实验载 荷 Test Load (T)	重量 Net Weight	打包后重量 Gross Weight (Kg)	起升高度每增加 1m 时所增加重量 Extra Weight per Meter of Extra Lifting Height
HSZ-VT0.5	0.5	2.5	262	26	5mm*1	0.75	7	75	1.5
HSZ-VT1	1	3	304	42	6mm*1	15	10.5	11	1.8
HSZ-VT1.5	1.5	3	395	51	8mm*1	2.4	15.5	16	2
HSZ-VT2	2	3	330	83	6mm*2	3	17	18	2.7
HSZ-VT3	3	3	402	102	8mm*2	4.5	23	25	3.2
HSZ-VT5	5	3	415	156	10mm*2	7.5	39	42	5.3
HSZ-VT10	10	3	428	312	10mm*4	12.5	69	77	9.8
HSZ-VT20	20	3	428*2	312*2	10mm*8	25	162	232	19.8

★ Never exceed Working Load Limit

● HSH 手扳葫芦 HSH Manual Lever Block




型号 Model	0.5T single chain	1T single chain	2T single chain	2T Double chain	3T single chain	3T Double chain	5T Double chain	7.5T Triple chain	10T Triple chain
起重量 Lifting Capacity (T)	0.5	1	2	2	3	3	5	7.5	10
标准提升高度 Standard Lifting Height (M)	3	3	3	3	3	3	3	3	3
试验载荷 Test Load (T)	0.75	1.5	3	3	4.5	4.5	7.5	10	12.5
最大链条张力 Maximum Chain Tension (N)	240	250	335	330	363	370	360	410	380
起重链条数量 Number of Lifting Chain Lines	1	1	1	2	1	2	2	3	4
提升链直径 Diameter of Lifting Chain	5	6	8	6	10	7/8	10	10	10
重量 Weight (KG)	9	12	19	16	26	23	42	68	70

● HSH-VT 手扳葫芦 HSH-VT Lever Block



型号 Model	HSH-VT-0.75T	HSH-VT-1.5T	HSH-VT-3T	HSH-VT-6T
起重量 Capacity (Kg)	750	1500	3000	6000
标准提升高度 Lifting Height (M)	1.5	1.5	1.5	1.5
试验载荷 Test Load	1125	2500	4500	7500
满载时手扳力 Force For Full Load	250	310	410	420
起重链条规格 Load Chain Size	行数 Falls	1	1	2
	链条直径 Dia of Chain	6*18	8x24	10x30
两钩间最小距离 Min Distance Between Two Hooks	Mm	440	550	650
手柄长度 Handle Length	Mm	285	410	410
净重 / 毛重 Nw/Gw(Kg)	6.7	11	17.5	25.5

● 轨道跑车 Hoist Trolley

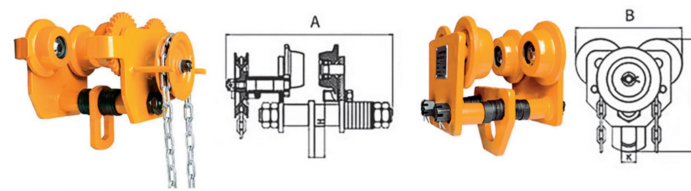

● GCL Manual Geared Trolley GCL 手拉跑车

额定载重量 Rated Load Capacity (t)		1	2	3	5	10
主要尺寸 Main Dimensions	A	242	280	300	316	362
	B	210	240	280	320	389
	C	211	236	295	334	490
	K	115	130	164	177	275
轨宽范围 Rail Width Range (Mm)		68-100	94-124	116-140	142-180	142-180
净重 Net Weight (Kg)		9	12	19	30	88

● GCT Manual Plain Trolley GCT 手推跑车

额定载重量 Rated Load Capacity (t)		0.5	1	2	3	5	10
主要尺寸 Main Dimensions	A	177	194	235	275	338	362
	B	170	206	240	282	327	389
	C	187	206	243	321	392.5	489.5
	K	114	119	140	212	245	320
轨宽范围 Rail Width Range (Mm)		68-94	68-100	94-124	116-140	142-180	142-180
净重 Net Weight (Kg)		5	7	10	15	28	88

● Electric Beam Trolley 微电跑车

额定载荷 Rated Load (T)	0.5 吨	1 吨	
实验载荷 Test Load (T)	0.6	1.2	
标准运行高度 Standard Operating Height (M)	3	3	
运行速度 Operating Speed M/min (M/min)	16.4	16.4	
能通过的小弯道半径 Radius of Small Curve That Can Pass (M)	1	1	
电机参数 Motor Parameters	额定电压 Rated Voltage	220V	220V
	功率 Power	60	200
	转速 Speed (R/min)	1400	1400
推荐用工字钢 Recommended I-beam	电源 Power Supply	AC220/50HZ	
	工字钢号 I-Steel Grade	10-22	
重量 Weight (Kg)	轨宽 Rail Width (Mm)	69-110	
		5-10	11-19

● 轨道跑车 Electric Hoist Trolley

● 便携式牵引葫芦 Portable Electric Hoist



0.5T electric trolley



1-5T electric trolley

Product Parameters

型号 Model	额定载荷 Rated Load (T)	单位 Unit (mm)				运行速度 Operating Speed M/min	电机功率 Motor Power	最小转弯半径 Minimum Turning Radius
		W	U	R	T			
DPC-0.5	0.5	315	212	142	231	快速 21m/min & 慢速 11m/min	0.4	0.7
DPC-01	1	315	212				0.4	0.8
DPC-02	2	325	220				0.4	0.9
DPC-03	3	340	250				0.75	1.0
DPC-05	5	400	291				0.75	1.5
DPC-7.5	7.5	400	291				0.75	1.8
DPC-10	10	500	371				0.75	2.0

★ Never exceed Working Load Limit



High-strength hook
It can rotate 360 degrees
with safety latch.



Galvanized steel wire rope
Wear-resistance & not easy to
break 1/5 inch*16ft.



Gear box
High working efficiency &
heatdissipation for ventilation.




Limit switch
The machine automatically
cutoff when the stopper is
triggered.

Product Parameters

最大起重量 Max. Load	500KG	300KG	200KG	100KG
额定电压 Voltage	220V	220V	220V	220V
电机功率 Power	1500W	1500W	1500W	1500W
钢丝绳直径 Wire Rope Diameter	6mm	5mm	4mm	3mm
钢丝绳长度 Wire Rope Length	7.6M	11.8M	19M	25M
起升速度 Lifting Speed	5M/min	5M/min	5M/min	5M/min
包装尺寸 Packed Size	38*32*25cm	38*32*25cm	38*32*25cm	38*32*25cm

● DK 悬挂式钢丝绳便携升降机 (新款双孔小金刚 / 大金刚)
DK Mini Electric Cable Puller

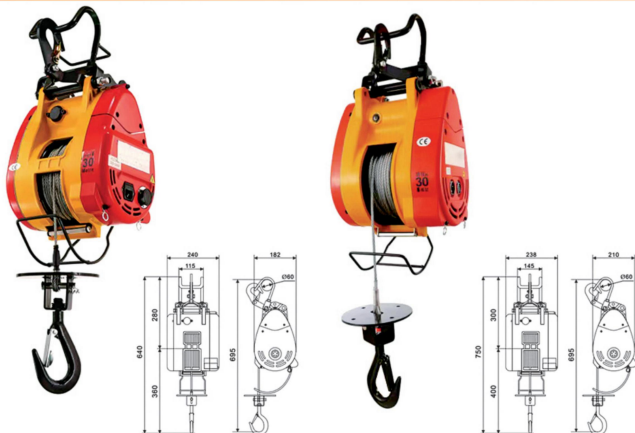

Product Parameters

型号 Model	DK- 系列 DK Series			提升速度 Lifting Speed	160kg/180kg/230kg/ 250kg/300kg/360kg	19m/min
额定起重 Capacity	160kg/180kg/230kg/ 250kg/300kg/360kg/ 500kg	500kg	800kg		50kg/800kg	13m/min
起重高度 Lifting Height	30m	60m	30m	60Hz	160kg/180kg/230kg/ 250kg/300kg/360kg	23m/min
钢丝绳直径 Wire Rope Diameter	5mm	5mm	6mm		500kg/800kg	15m/min
电机 Power	1200W	160kg		电源 Voltage	单相 Single-phase 110V-220V, 220-240V, AC 50/60Hz	
	1300W	180kg/230kg		工作周期 Working Requirements	ED 25% 允许最大工作时间 15 分钟 / 每小时, 允许间隙使用次数 150 次 / 每小时 Max. working frequency 15mins/ hour; 150times/hour	
	1500W	250kg		国际标准防护等级 International Standard Protection Level	54	
	1600W	300kg/360kg		绝缘等级 Insulation Class	F	
	1800W	500kg				
2200W	800kg					

● PA 微型电动钢丝绳葫芦 PA Mini Electric Wire Rope Hoist



Product Parameters

产品型号 Product Model	单绳和双绳提升重量 Single And Double Rope Lifting Weight	单、双绳提升 高度 Lifting Height of Single And Double Ropes	单、双绳提升速度 Lifting Speed of Single and Double Ropes	外观尺寸 Appearance Dimension	钢丝绳长度 Wire Rope Length	钢丝绳直径 Diameter of Wire Rope	额定功率 Rated Power	整机自重 Weight
PA200	100kg/200kg	12m/6m	2m/min/6m/min	34*13cm	12-30m	3mm	0.51kw	11kg
PA300	150kg/300kg	12m/6m	12m/min/6m/min	34*13cm	12-30m	4mm	0.6kw	11.5kg
PA400	200kg/400kg	12m/6m	12m/min/6m/min	38.5*14cm	12-30m	4mm	1.0kw	16kg
PA500	250kg/500kg	12m/6m	12mi/min/6m/min	38.5*74cm	12-30m	4mm	1.02kw	16.5kg
PA600	300kg/600kg	12m/6m	2mi/min/6m/mi	38.5*14cm	12-30m	4.5mm	1.2kw	17kg
PA800	400kg/800kg	12m/6m	2mi/min/6m/min	40.574.5cm	12-30m	5mm	1.3kw	20kg
PA1000	500kg/999kg	12m/6m	2mi/min/6m/min	48*17cm	12-30m	6mm	1.6kw	31kg

★ Never exceed Working Load Limit

● BCD 电动提升机 BCD Electric Hoist Winch



Steel shell for electrical hoist winch
金属外壳



Wire rope for winch
优质钢丝绳



Copper motor of electric hoist winch
纯铜电机



Product Parameters

产品型号 Product Model	使用方法 Usage Method	额定电压 Rated Voltage (V)	功率 Power (Kw)	额定起重量 Rated Lifting Capacity (Kg)	提升速度 Lifting Speed (M/min)	提升高度 Lifting Height (M)	钢丝绳直径 Wire Rope Diameter (Mm)
BCD-K1 300-600	Single rope	380V	1.7	300	24	1-100	6.0
	Double rope	50HZ		600	12	1-100	
BCD-K1 300-600	Single rope	220V	3.0	300	28	1-100	6.0
	Double rope	50HZ		600	14	1-100	
BCD-K1 350-700	Single rope	380V	2.2	350	24	1-100	6.0
	Double rope	50HZ		700	12	1-100	
BCD-K1 350-700	Single rope	220V	3.0	350	24	1-100	6.0
	Double rope	50HZ		700	12	1-100	
BCD-K1 400-800	Single rope	220V	4.0	400	24	1-100	6.0
	Double rope	50HZ		800	12	1-100	
BCD-K1 500-1000	Single rope	380V	2.2	500	14	1-100	6.0
	Double rope	50HZ		1000	7	1-100	
BCD-K1 500-1000	Single rope	220V	2.2	500	14	1-100	6.0
	Double rope	50HZ		1000	7	1-100	
BCD-K1 600-1200	Single rope	380V	3.0	600	14	1-100	6.0
	Double rope	50HZ		1200	7	1-100	
BCD-K1 600-1200	Single rope	220V	3.0	600	14	1-100	6.0
	Double rope	50HZ		1200	7	1-100	
BCD-K1 700-1500	Single rope	220V	4.0	750	14	1-100	7.0
	Double rope	50HZ		1500	7	1-100	

★ Never exceed Working Load Limit

● CD MD 电动钢丝绳葫芦 CD MD Electric Wire Rope Hoist



CD Electric Wire Rope Hoist
CD 型电动钢丝绳葫芦



MD Electric Wire Rope Hoist
MD 电动钢丝绳葫芦



High Strength Forged Steel Hook
Be able to swivel 360 degrees under load.
高强度锻造吊钩，可 360 度旋转。



Top quality Premium Wire Rope
Be resistance to fatigue and wear.
顶级优质钢丝绳，抗疲劳和磨损。



Reliable Motor brake
Be sure for long service life.
优质的电机制动器，使用寿命长。

Product Parameters

额定载荷 Capacity (T)	0.5		1			2			3			5			10													
提升高度 Lifting Height (M)	6	9	12	18	6	9	12	18	24	30	6	9	12	18	24	30	6	9	12	18	24	30	6	9	12	18	24	30
提升速度 Lifting Speed (M/min)	8															7												
速度 Travelling Speed (M/min)	20																											
电源 Power Supply (V:Hz)	380V:50Hz:3 Phase																											
钢丝绳 Wire Rope	规格 Specification	5.1-6X19+NF 1770-25			7.4-6x37+ NF-1770-1-5			11-6x37+ NF-1670-25			13-6x37+NF 1670-1-25			15-6x37+NF 1670-1-25														
	结构 Structure	Strand 1+6+12																										
轨道 Rail	工字钢 I-beam	16-28b			20-32c			20a-45C			28a-63C																	
	最小半径 Mini Gurvature Radius	1	1.2	1	1.2	1.8	2.5	3.3	1.2	1.5	2.0	2.5	3.0	1.2	1.5	2.0	2.5	3.5	1.5	2.5	3.0	4.0	3.0	3.5	4.5	6.0	7.2	
电机 Motor	主吊起 Main Hoisting	功率 Power (Kw)	0.8			1.5			3.0			4.5			7.5			13										
		速度 Speed (r/min)	1380			1380			1380			1380			1400			1400										
	辅助吊起 Auxiliary Hoisting	功率 Power (Kw)	0.2			0.4			0.8			0.8			1.5													
		速度 Speed (r/min)	1380			1380			1380			1380			1380													
Travelling	功率 Power (Kw)	0.2			0.4			0.8																				
	速度 Speed (r/min)	1380			1380			1380																				

★ Never exceed Working Load Limit

● 低净空电动钢丝绳葫芦 Low Headroom Electric Wire Rope Hoist

LCD1 LMD1 Low headroom electric hoist
 Low Headroom Electric Wire Rope Hoist is improved from CD1 and MD1 Electric Wire Rope Hoist.. It is designed to save room of work space. And widely used in workshop, warehouse and workplace which has restriction on lifting height .
 Low Headroom Electric Wire Rope Hoist has same technical specification and working condition with CD1 MD1 Electric Wire Rope Hoist, expect increasing more lifting headroom and save construction space of workshop (200-500mm).


LCD1 LMD1 低净空电动葫芦

低净空电动钢丝绳葫芦是由 CD1 和 MD1 电动钢丝绳升降机改进而来。。它旨在节省工作空间。广泛应用于车间、仓库和对提升高度有限制的工作场所。

低净空电动钢丝绳葫芦具有与 CD1 MD1 电动钢丝绳升降机相同的技术规格和工作条件，期望增加更多的提升净空，并节省车间的施工空间（200-500mm）。




● 一字卷扬机 Slotted Winch

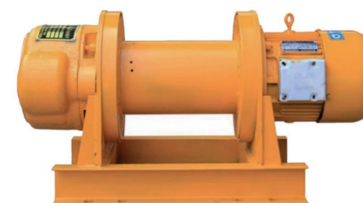

Product Parameters

产品型号 Product Model	1T		2T		3T		5T	
	Single rope 单绳	Double rope 双绳	Single rope 单绳	Double rope 双绳	Single rope 单绳	Double rope 双绳	Single rope 单绳	Double rope 双绳
额定电压 Rated Voltage (V)	380		380		380		380	
功率 Power (KW)	1.5		3.0		4.5		7.5	
额定起重 Rated Lifting Capacity (Kg)	500	1000	1000	2000	1500	3000	2500	5000
起升速度 Lifting Speed (m/min)	16	8	16	8	16	8	16	8
起升高度 Lifting Height (m)	30-100		30-100		30-100		30-100	
绳直 Rope Straightness (mm)	8		11		13		15	
净重 Net Weight (kg)	80		130		160		260	
钢丝绳 Wire Rope (#)	7.7#		11#		13#		15#	
整机长度 Overall Length (mm)	800		830		950		1100	
槽钢长度 Length of Channel Steel (mm)	530		600		650		750	
高度 Height (mm)	390		510		520		600	
宽度 Width (mm)	320		430		460		530	
中心距 Center Distance (mm)	260		275		290		320	

● JK 电动卷扬机 JK Electric Windlass

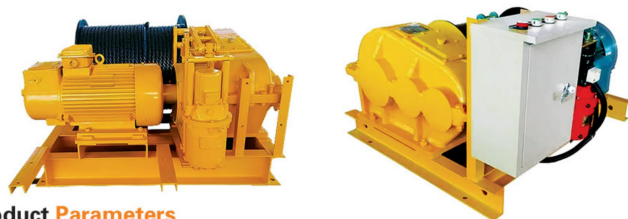

Product Parameters

产品型号 Product Model		JK0.5	JK0.75	JK1	JK2	JK3	JK5	JK10
钢丝绳额定张力 Rated Tension of Wire Rope (Kn)		5(0.5T)	7.5(0.75T)	10(1T)	20(2T)	30(3T)	50(5T)	100(10T)
钢丝绳 Wire Rope	规格直径 Specification Diameter (Mm)	6*19φ7.7	6*19φ7.7	6*19φ9.3	6*19φ12.5	6*19φ15	6*19φ20	6*19φ25
	提升速度 Lifting Speed (M/min)	25-29	25-29	25-29	25-29	25-29	25-29	可调
Drum 卷筒	直径长度 Diameter Length (Mm)	φ140*315	φ140*335	φ165*400	φ200*470	φ245*480	φ325*480	φ510*900
	绳索容量 Rope Volumes (M)	100	100	130	180	200	200	300
减速箱加油量 Oil Filling Volume of Reduction Gear Box (L)		6	6.5	7.5	13	17	24	41
Motor 发动机	Model 型号	Y100L2-4	Y112L4	Y132S-4	Y160M-4	Y160M-4	Y180M-4	YZR250M1-6
	Power 功率 (Kw)	3	4	5.5	11	15	18.5	22
	Min Speed 最小速度	1420	1440	1440	1460	1460	1470	960
Brake Model 制动器型号		TJ2-100	TJ2-100	TJ2-150	TJ2-300	TJ2-300	TJ2-300	TYWZ-400/45
Electromagnet Model		MZD2-100	MZD2-100	MZD2-100	MZD2-200	MZD2-200	RT14-60/1J	KJ1-80/1J
Overall Dimension 外形尺寸 (Mm)		700*660*325	700*675*330	700*800*380	1130*970*525	1150*1085*565	515*1455*740	920*1135*980
Weight 整机重量 (Kg)		110	150	190	450	600	980	2400

★ Never exceed Working Load Limit



● 多功能钢丝绳紧线器 Ratchet Cable Puller



型号 Model	安全荷重 Safe Load (T)	钢索直径 X 长度 Wire Rope Diaand Length (Mm)	尺寸 Measurement (Mm)	净重 Net Weight (Kg)
NO-1000	1.0	5X1000(双串)	580	3.3
NO-2000	2.0	6x1500(双串)	680	4.7
NO-3000	3.0	8x1500(双串)	680	6.0

● NSX 型钢丝绳手扳葫芦 NSX Type Steel Wire Rope Hoist

● NST 型钢丝绳手扳葫芦 NST Type Steel Wire Rope Hoist

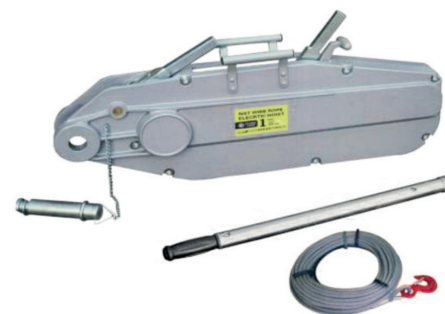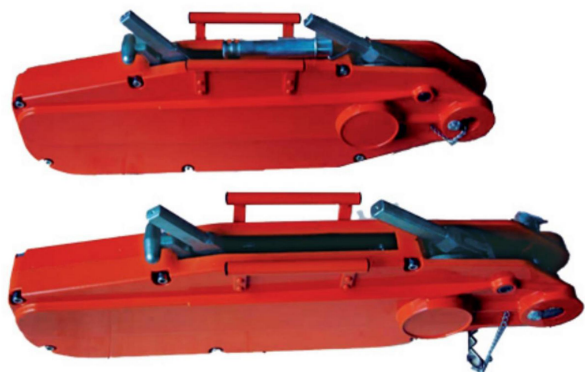

型号 Model	NSX-6180.8	NSX-6181.0	NSX-6181.6	NSX-6183.2
额定起重量 Capacity (T)	0.8	1	1.6	3.2
额定前时行程 Rated Forward Travel (Mm)	≥ 52	≥ 52	≥ 55	≥ 28
前进手柄有效长度 Efficient Length of Forward Handle (Mm)	825	825	1200	1200
传动级数 Drive Grade	1	1	1	2
钢丝绳直径 Wire Rope Diameter (Mm)	8	8	11	16
钢丝绳标准长度 Standard Length of Rope (Mm)	10:20	10:20	10:20	10
净重 NW (Kg)	6	6	12	12
额定前时手扳力 Rated Forward Handpower (N)	≤ 284	≤ 353	≤ 412	≤ 441
装箱尺寸 Packing Size (Mm)	428x64x235	428x64x235	545x97x286	660x116x350

型号 Model	NSX-6180.8	NSX-6181.0	NSX-6181.6	NSX-6183.2
额定起重量 Capacity(T)	0.8	1	1.6	3.2
额定前时行程 Rated Forward Travel (Mm)	≥ 52	≥ 52	≥ 55	≥ 28
前进手柄有效长度 Efficient Length of Forward Handle (Mm)	825	825	1200	1200
传动级数 Drive Grade	1	1	1	2
钢丝绳直径 Wire Rope Diameter (Mm)	8	8	11	16
钢丝绳标准长度 Standard Length of Rope (Mm)	10:20	10:20	10:20	10
净重 NW (Kg)	6	6	12	12
额定前时手扳力 Rated Forward Handpower (N)	≤ 284	≤ 353	≤ 412	≤ 441
装箱尺寸 Packing Size (Mm)	428x64x235	428x64x235	545x97x286	660x116x350


● HBSQ-K 型防爆手拉葫芦
HBSQ-K Explosion-Proof Chain Hoist



Product Parameters

型号 Model	HBSQ-K0.5	HBSQ-K1	HBSQ-K2	HBSQ-K3	HBSQ-K5	HBSQ-K10	HBSQ-K20
额定载荷 Rated Load (T)	0.5	1	5	5	15	20	30
起升高度 Lifting Height (M)	2.5	2.5	2.5	3	3	3	3
试验载荷 Test Load (T)	0.75	1.5	3	4.5	7.5	12.5	25
链条行数 Falls of Chain	2	2	2	2	2	4	8
净重 N.W(Kg)	13	16	26	36	40	86	185

● HBSQ 型防爆手拉葫芦
HBSQ Explosion-Proof Chain Hoist

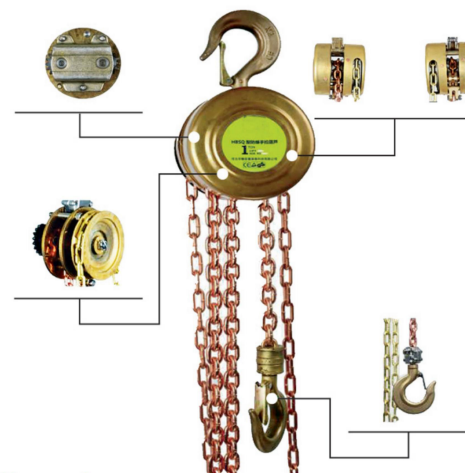

Product Parameters

型号 Model	HBSQ0.5	HBSQ1	HBSQ2	HBSQ3	HBSQ5	HBSQ7.5	HBSQ10	HBSQ20
额定载荷 Rated Load(T)	0.5	1	5	5	15	7.5	20	30
起升高度 Lifting Height(M)	2.5	2.5	2.5	3	3	3	3	3
试验载荷 Test Load(T)	0.75	1.5	3	4.5	7.5	11.2	12.5	25
链条行数 Falls of Chain	2	2	2	2	2	3	4	8
尺寸 Measurement	A	145	145	175	220	226	340	350
	B	130	130	145	170	170	170	170
	Hmin	270	444	486	616	630	650	700
净重 N.W(Kg)	13	16	26	36	40	66	86	185

● DHBY 型防爆环链电动葫芦
DHBY Explosion-Proof Electric Chain Hoist

● GCBL 防爆手拉跑车 GCBL Explosion-Proof Geared Trolley
GCBT 防爆手推跑车 GCBT Explosion-Proof Plain Trolley



Product Parameters

型号 Model	DHBY	DHBY	DHBY	DHBY	DHBY
额定载荷 Rated Load(T)	1	2		3	5
试验载荷 Test Load(T)	1.5	2.5		3.5	5.5
电机型号功率 Motor Type&Power	YHPE500W				
电源电压 Voltage	380V50HZ				
标准提升高度 Lifting Height(M)	1.8				
提升速度 Speed M/min	2.5	2	1.25	1.25	1
链条行数 Falls of chain	1	1	2	2	2



Product Parameters

规格 Model	GCBL1	GCBL2	GCBL3	GCBL5	GCBL10	GCBL20
	GCBT1	GCBT2	GCBT3	GCBT5	GCBT10	GCBT20
额定载荷 Rated Load(T)	1	2	3	5	10	20
试验载荷 Test Load(Kn)	1.5	3	4.5	7.5	15	30
标准运行高度 Lifting Height (M)	3	3	3	3	3	3
轨道宽度范围 I-Beam Recommended (Mm)	90-122	102-152	110-165	122-172	130-210	130-210
重量 N.W(Kg)	11.5	16.5	22.5	29.5	46.5	106

● HSZ-K 型不锈钢手拉葫芦
HSZ-K Stainless Steel Chain Hoist



Product Parameters

型号 Model	HSZ-K0.5	HSZ-K1	HSZ-K1.5	HSZ-K2	HSZ-K3	HSZ-K5	HSZ-K10	HSZ-K20
额定载荷 Rated Load(T)	0.5	1	1.5	2	3	5	10	20
标准起升高度 Lifting Height(M)	2.5	2.5	2.5	3	3	3	3	3
试验载荷 Test Load(T)	7.5	15	22.5	30	45	77	150	300
两钩间最小距离 Minimum Distance Between Two Hooks (Mm)	270	317	399	444	465	636	798	890
最大手拉力 Maximum Hand Pull (N)	231	309	320	360	340	414	414	828
起重链条直径 Diameter of Lifting Chain (CM)	6	6	8	8	8	10	10	10
起重链条行数 Falls of Chain	1	1	1	2	2	2	4	8
净重 N.W(Kg)	11.25	11.5	17.4	22.2	26.2	37.7	72	160

● HSZ- B 型不锈钢手拉葫芦
HSZ-B Stainless Steel Chain Hoist



Product Parameters

型号 Model	HSZ-K0.5	HSZ-K1	HSZ-K1.5	HSZ-K2	HSZ-K3	HSZ-K5	HSZ-K10	HSZ-K20
额定载荷 Rated Load (T)	0.5	1	1.5	2	3	5	10	20
标准起升高度 Lifting Height (M)	2.5	2.5	2.5	3	3	3	3	3
试验载荷 Test Load (T)	0.75	1.5	2.25	3	4.5	7.5	15	30
两钩间最小距离 Minimum Distance Between Two Hooks (Mm)	280	300	360	380	470	600	730	1000
最大手拉力 Maximum Hand Pull (N)	167	314	373	314	373	516	516	516
起重链条直径 Diameter of Lifting Chain (CM)	6	6	8	6	8	10	10	10
起重链条行数 Falls of Chain	1	1	1	2	2	2	4	8
净重 N.W (Kg)	9.5	10	15	14	24	36	68	150
起升高度每增加一 米增加重量 Extra Weight Per Meter of Extralift (Kg)	1.8	1.8	2.4	2.7	3.8	5.3	9.8	19.6
包装尺寸 Packing Size (L*W*H)(Mm)	25*18*17	25*17*16	26*23*17	27*20*16	32*23*17	41*30*21	62*50*27	80*70*36

★ Never exceed Working Load Limit

● FKS 铝合金手拉葫芦 FKS Aluminum Alloy Chain Hoist




Transmission gear
 ◆ 2.0 chrome
 Steel material
 ◆ One
 suppression form
 ◆ Not easy to
 wear
 ◆ Transmission
 performances
 good
 ◆ Good meshing



Double pawls
 ◆ Mechanical
 load brake device
 ◆ Double pawl
 springs
 ◆ Good durability
 ◆ High safety
 performance




Limit stop
 ◆ Limited plate
 can prevent
 goods to
 low from accident.



Product Parameters

型号 Model	1T	2T	3T	3T	5T	
额定载荷 Rated Load(T)	1	2	3	3	5	
提升高度 Lifting Height(M)	3	3	3	3	3	
实验载荷 Test Load(T)	1.5	3	4.5	4.5	7.5	
满载手拉力 Full Load Hand Pull (N)	270	334	261	411	358	
链条直径 Diameter of Chains(CM)	6	8	8	10	10	
链条行数 Falls of Chain	1	1	2	1	2	
主要尺寸 Dimension (mm)	A	139.5	158	158	171.5	171.5
	B	155	192	233	226	273
	C	385	485	585	575	665
	D	44	50.5	58.5	58.5	68.5
	K	29	34	40	40	47

● 铝合金手扳葫芦 Aluminum Alloy Lever Block



Product Parameters

主要尺寸 Main Dimensions (Cm)	A	8.6	9.5	12.1	13.9	17.3	17.3
B	15.5	17.8	20.4	23.5	28.6	34	
C	17	17	24	24	38.5	38.5	
D	3	3.5	3	4.2	5.2	6	
E	7.9	8.7	11.2	13.3	16.2	16.2	
Hmin	24.5	28.5	33.5	36.5	44.8	60	
G	9.7	11.7	12.4	15.9	17.8	17.8	
H	7.7	8	8.4	9	9.7	9.7	

型号 Model	250Kg	500Kg	750Kg	1500Kg	3000Kg	6000Kg
牵引力 Tractive Force	550 Pound	1100 Pound	1650 Pound	3300 Pound	6600 Pound	13200 Pound
起重高度 Lifting Height	1.5 M	1.5 M	1.5 M	1.5 M	1.5 M	1.5 M
实验载荷 Experimental Load	375Kg	750Kg	1125Kg	2250Kg	4500Kg	9000Kg
满载手扳力 Fully Loaded Wrench Force	260N	260N	220N	240N	350N	380N
起重链条行数 Number of Lifting Chain Rows	12	12	15	21	27	27
链条直径 Diameter of Chains	4Mm	4Mm	5Mm	7Mm	9Mm	9Mm
每增加一米时的 重量 Weight Per Additional Meter	0.346Kg	0.346Kg	0.541Kg	1.1Kg	1.8Kg	1.8Kg
净重 Net Weight	2.2Kg	3.2Kg	4.7Kg	7.6Kg	14Kg	22Kg
打包重量 Packaged Weight	2.4Kg	3.4Kg	5Kg	8Kg	14.5Kg	22.5Kg
包装尺寸 Package Size	21*12.5*11.5 Cm	23.5*13.5*12 Cm	30*14*14.5 Cm	33*18*15.7 Cm	40*20*19 Cm	49.5*23.5*21.5 Cm

SLINGS AND RIGGINGS



● EA 双眼圆形吊装带 EA Double Eyes Round Webbing Sling



吊带型号 Model	颜色 Color	1 根吊带单独使用载荷 Single max Working Load Limit						2 根同时使用时载荷 Double Used Working Load				近似宽度 Approximate Width (CM)	最小长度 Minimum Length (M)	最大长度 Maximum Length (M)
		直吊拉力 Straight Load (Kg)		β				直吊拉力 Straight Load (Kg)		直吊拉力 Straight Load (Kg)				
		1	0.8	0° - 7°	7° - 45°	45° - 60°	45°	1.4	1.12	1	0.8			
EA-01	紫	1000	800	2000	1400	1000	700	1400	1120	1000	800	40	1	100
EA-02	绿	2000	1600	4000	2800	2000	1400	2800	2240	2000	1600	50	1	100
EA-03	黄	3000	2400	6090	4200	3000	2100	4200	3360	3000	2400	60	1	100
EA-04	灰	4000	3200	8000	5600	4000	2800	5600	4480	4000	3200	70	1	100
EA-05	红	5000	4000	10000	7000	5000	3500	7000	5600	5000	4000	75	1	100
EA-06	棕	6000	4800	12000	8400	6000	4200	8400	6720	6000	4800	80	1	100
EA-08	蓝	8000	6400	16000	11200	8000	5600	11200	8960	8000	6400	90	1	100
EA-10	橙	10000	8000	20000	14000	10000	7000	14000	11200	10000	8000	100	1	100
EA-12	橘	12000	9600	24000	16800	12000	8400	16800	13440	12000	9600	110	1	100
EA-15	深橘	15000	12000	40000	28000	15000	14000	28000	22400	15000	12000	125	1	100
EA-20	深橘	20000	16000	60000	42000	20000	21000	42000	33600	20000	16000	150	1	100
EA-25	深橘	25000	20000	50000	35000	25000	17500	35000	28000	25000	20000	180	1	100
EA-30	深橘	30000	24000	60000	42000	30000	21000	42000	33600	30000	24000	200	1	100
EA-40	深橘	40000	32000	80000	56000	40000	28000	56000	44800	40000	32000	200	1	100
EA-50	深橘	50000	40000	100000	70000	50000	35000	70000	56000	50000	40000	220	1	100
EA-60	深橘	60000	48000	120000	84000	60000	42000	84000	67200	60000	48000	220	1	100

● EA 圆形吊装带 EA Endless Round Webbing



吊带型号 Model	颜色 Color	1 根吊带单独使用载荷 Single max Working Load Limit						2 根同时使用时载荷 Double Used Working Load				近似宽度 Approximate Width (CM)	最小长度 Minimum Length (M)	最大长度 Maximum Length (M)
		直吊拉力 Straight Load (Kg)		β				直吊拉力 Straight Load (Kg)		直吊拉力 Straight Load (Kg)				
		1	0.8	0° - 7°	7° - 45°	45° - 60°	45°	1.4	1.12	1	0.8			
EA-A-01	紫	1000	800	2000	1400	1000	700	1400	1120	1000	800	50	1	100
EA-A-02	绿	2000	1600	4000	2800	2000	1400	2800	2240	2000	1600	60	1	100
EA-A-03	黄	3000	2400	6090	4200	3000	2100	4200	3360	3000	2400	70	1	100
EA-A-04	灰	4000	3200	8000	5600	4000	2800	5600	4480	4000	3200	75	1	100
EA-A-05	红	5000	4000	10000	7000	5000	3500	7000	5600	5000	4000	80	1	100
EA-A-06	棕	6000	4800	12000	8400	6000	4200	8400	6720	6000	4800	90	1	100
EA-A-08	蓝	8000	6400	16000	11200	8000	5600	11200	8960	8000	6400	100	1	100
EAA-10	橙	10000	8000	20000	14000	10000	7000	14000	11200	10000	8000	110	1	100
EA-A-12	橘	12000	9600	24000	16800	12000	8400	16800	13440	12000	9600	125	1	100
EAA-15	深橘	15000	12000	40000	28000	15000	14000	28000	22400	15000	12000	150	1	100
EA-A-20	深橘	20000	16000	60000	42000	20000	21000	42000	33600	20000	16000	180	1	100
EA-A-25	深橘	25000	20000	50000	35000	25000	17500	35000	28000	25000	20000	200	1	100
EA-A-30	深橘	30000	24000	60000	42000	30000	21000	42000	33600	30000	24000	220	1	100
EA-A-40	深橘	40000	32000	80000	56000	40000	28000	56000	44800	40000	32000	250	1	100
EA-A-50	深橘	50000	40000	100000	70000	50000	35000	70000	56000	50000	40000	270	1	100
EA-A-60	深橘	60000	48000	120000	84000	60000	42000	84000	67200	60000	48000	280	1	100
EA-A-80	深橘	80000	64000	160000	112000	80000	56000	112000	89600	80000	64000	300	1	100
EA-A-100	深橘	100000	80000	200000	140000	100000	70000	140000	112000	100000	80000	320	1	100

● EB 扁平吊装带 EB Endless Flat Webbing Sling



吊带型号 Model	颜色 Color	1 根吊带单独使用荷载 Single max. Working Load Limit						2 根同时使用时荷载 Double Used Working Load				近似宽度 Approximate Width (CM)			最小长度 Minimum Length (M)	最大长度 Maximum Length (M)
		直吊拉力 Straight Load (Kg)	捆索拉力 Chocked Load (Kg)	β				直吊拉力 Straight Load (Kg)	捆索拉力 Chocked Load (Kg)	直吊拉力 Straight Load (Kg)	捆索拉力 Chocked Load (Kg)	5.01	6.01	7.01		
				0° - 7°	7° - 45°	45° - 60°	45°									
		1	0.8	2	1.4	1	0.7	1.4	1.12	1	0.8					
EB-B-01	紫	1000	800	2000	1400	1000	700	1400	1120	1000	800	25	25	30	1	100
EB-B-02	绿	2000	1600	4000	2800	2000	1400	2800	2240	2000	1600	50	50	60	1	100
EB-B-03	黄	3000	2400	6090	4200	3000	2100	4200	3360	3000	2400	75	75	90	1	100
EB-B-04	灰	4000	3200	8000	5600	4000	2800	5600	4480	4000	3200	100	100	120	1	100
EB-B-05	红	5000	4000	10000	7000	5000	3500	7000	5600	5000	4000	125	125	150	1	100
EB-B-06	棕	6000	4800	12000	8400	6000	4200	8400	6720	6000	4800	150	150	180	1	100
EB-B-08	蓝	8000	6400	16000	11200	8000	5600	11200	8960	8000	6400	200	200	240	1	100
EB-B-10	橙	10000	8000	20000	14000	10000	7000	14000	11200	10000	8000	250	250	300	1	100
EB-B-12	黑	12000	9600	24000	16800	12000	8400	16800	13440	12000	9600	300	300	300	1	100
EB-B-15	白	15000	12000	40000	28000	15000	10000	28000	22400	15000	12000	200	200	240	1	100
EB-B-20	黄	20000	16000	60000	42000	20000	14000	42000	33600	20000	16000	250	250	300	1	100
EB-B-25	橙	25000	20000	50000	35000	25000	17500	35000	28000	25000	20000	300	300	300	1	100
EB-B-30	黄	30000	24000	60000	42000	30000	21000	42000	33600	30000	24000	300	300	300	1	100
EB-B-40	黄	40000	32000	80000	56000	40000	28000	56000	44800	40000	32000				1	100
EB-B-50	黄	50000	40000	100000	70000	50000	35000	70000	56000	50000	40000				1	100

● EB 双眼扁平吊装带 EB Double Eyes Flat Webbing Sling



吊带型号 Model	颜色 Color	1 根吊带单独使用荷载 Single max. Working Load Limit						2 根同时使用时荷载 Double Used Working Load				近似宽度 Approximate Width (CM)			最小长度 Minimum Length (M)	最大长度 Maximum Length (M)
		直吊拉力 Straight Load	捆索拉力 Chocked Load	β				直吊拉力 Straight Load	捆索拉力 Chocked Load	直吊拉力 Straight Load	捆索拉力 Chocked Load	5.01	6.01	7.01		
				0° - 7°	7° - 45°	45° - 60°	45°									
		1	0.8	2	1.4	1	0.7	1.4	1.12	1	0.8					
EB-01	紫	1000	800	2000	1400	1000	700	1400	1120	1000	800	25	25	30	1	100
EB-02	绿	2000	1600	4000	2800	2000	1400	2800	2240	2000	1600	50	50	60	1	100
EB-03	黄	3000	2400	6090	4200	3000	2100	4200	3360	3000	2400	75	75	90	1	100
EB-04	灰	4000	3200	8000	5600	4000	2800	5600	4480	4000	3200	100	100	120	1	100
EB-05	红	5000	4000	10000	7000	5000	3500	7000	5600	5000	4000	125	125	150	1	100
EB-06	棕	6000	4800	12000	8400	6000	4200	8400	6720	6000	4800	150	150	180	1	100
EB-08	蓝	8000	6400	16000	11200	8000	5600	11200	8960	8000	6400	200	200	240	1	100
EB-10	橙	10000	8000	20000	14000	10000	7000	14000	11200	10000	8000	250	250	300	1	100
EB-12	黑	12000	9600	24000	16800	12000	8400	16800	13440	12000	9600	300	300	300	1	100
EB-15	白	15000	12000	40000	28000	15000	10000	28000	22400	15000	12000	200	200	240	1	100
EB-20	黄	20000	16000	60000	42000	20000	14000	42000	33600	20000	16000	250	250	300	1	100
EB-25	橙	25000	20000	50000	35000	25000	17500	35000	28000	25000	20000	300	300	300	1	100
EB-30	黄	30000	24000	60000	42000	30000	21000	42000	33600	30000	24000	300	300	300	1	100
EB-40	黄	40000	32000	80000	56000	40000	28000	56000	44800	40000	32000				1	100
EB-50	黄	50000	40000	100000	70000	50000	35000	70000	56000	50000	40000				1	100

● 吊带拉紧器 Webbing Ratchet




单向棘轮系紧装置 One-way Ratchet Tie Down	宽度 Width (Mm)	额定载荷 WLL (Kg)	长度 Length (M)	织带颜色 Color of Webbing
RO25	25	500	6	Customed
RO25	25	1,000	6	Customed
RO28	28	2,000	6	Customed
RO38	38	2,000	6	Customed
RO38	38	3,000	6	Customed
RO50	50	5,000	6	Customed
RO75	75	10,000	6	Customed

● G80 起重链条 G80 Lifting Chains



Black Chains
G80 黑链条



Galvanized Chains
G80 镀锌链条



Stainless Steel Chains
不锈钢链条

Product Parameters

规格 Size(mm)	宽度 Width(mm)		每米约重 Approx Weight (Kg)	工作载荷 Working Load (T)	实验载荷 Test Load (Kn)	破断载荷 Breaking Load (Kn)
	最小内宽 LInside	最大外宽 Outside				
6x18	7.5	21	0.79	1.1	27	45.2
7.1x21	9	24.5	1.07	1.5	37	61.6
8x24	10	28	1.38	2	48	80.4
9x27	10.8	30.6	1.75	2.5	62.5	101.7
10x30	12.5	35	2.2	3.2	76	126
11x43	12.6	36.5	2.33	3.8	92	154
12x36	15	42	3.1	4.6	109	180.9
13x39	16.3	46	3.8	5	128	212
14x42	18	49	4.13	6.3	150	250
16x48	20	56	5.63	8	192	322
18x54	23	63	6.85	10	246	407
20x60	25	70	8.6	12.5	300	503
22x65	28	74.2	10.7	15.3	366	608
26 x 78	35	91	14.87	21.3	510	850
30x90	38	105	19.6	28.3	678	1130
32x96	40	106	22.29	32.2	772	1286
34x126	38	109	22.7	36.3	870	1450
42x126	55.5	144.5	38.6	55.4	1332	2200

● G80 卸扣 G80 Shackle

● High Strength Pin Type Bow Shackle
高强度弓形卸扣带螺帽



额定载荷 WLL/T	重量 Weight (KG)
2	0.3
3.25	0.6
4.75	1
6.5	1.44
8.5	2.26
9.5	3.15
12	4.4
13.5	6.03
17	7.5
25	12.5
35	18.2
55	34.8

● High Strength Screw Type D Shackle
高强度 D 形卸扣带螺帽



额定载荷 WLL/T	重量 Weight (KG)
2	0.25
3.25	0.53
4.75	0.92
6.5	1.4
8.5	2
9.5	2.86
12	4
13.5	5.2
17	7.15
25	11
35	16.4
55	31.5

● High Strength Pin Type Bow Shackle
美式销型弓形卸扣



额定载荷 WLL/T	重量 Weight (KG)
2	0.35
3.25	0.63
4.75	1
6.5	1.75
8.5	2.4
9.5	3.37
12	4.75
13.5	6.2
17	8.3
25	13.3
35	19.1
55	36.9

● High Strength Pin Type D Shackle
美式销型 D 形卸扣



额定载荷 WLL/T	重量 Weight (KG)
2	0.25
3.25	0.53
4.75	0.92
6.5	1.4
8.5	2
9.5	2.86
12	4
13.5	5.2
17	7.15
25	11
35	16.4
55	31.5

● G80 吊钩 吊环 G80 Lifting Hook & Links

● Eye Hook
环眼钩 320C/320A

320C 碳钢 320C-Carbon		320A 合金钢 320A Alloy		重量 Weight (KG)
额定载荷 WLL(T)	破断拉力 B.L(T)	额定载荷 WLL(T)	破断拉力 B.L(T)	
0.5	2			0.2
	4	1.5	6	0.4
1.5	8	2	8	0.61
2	8	3	12	0.78
3	12	5	20	1.5
5	20	7	28	3.1
8	32			6.1
		0.75	3	0.2
		1	4	0.3
		11	44	6
		15	60	9.7
		22	88	17
		30	120	29.2
		37	120	29.2
		50	200	88



● The Large Opening Hook
大开口钩

额定载荷 WLL(T)	破断拉力 B.L(T)	重量 Weight(KG)
2	8	0.75
3.2	12.8	0.9
3.8	15.2	1
5.4	21.6	2.3
8	32	3.45
12.5	50	6.6



● Container Hook
货柜钩

额定载荷 WLL(T)	破断拉力 B.L(T)	重量 Weight (KG)
2	8	0.54
3	12	1.4
5	20	1.8
8	32	3.4



● Wide Nose Hook
宽嘴钩

额定载荷 WLL(T)	破断拉力 B.L(T)	重量 Weight (KG)
5000	20000	0.42
7000	28000	0.6



● Clevis Steel Pipe Hook
羊角钢管钩

工作负荷 Workload (T)	规格 Specifications (T)
1	1



● Steel Pipe Hook
钢管钩

额定载荷 WLL(T)	破断拉力 B.L(T)	重量 Weight (KG)
1	4	0.51



● European Type Clevis Grab Hook
欧式羊角翅钩

额定载荷 WLL(T)	破断拉力 B.L(T)	重量 Weight(KG)
1.12	4.48	0.25
2	8	0.32
3.2	12.6	0.73
5.4	21.2	1.6
8	32	2.8
12.5	50	5
15	60	6.3
21.2	84.8	14.5



● S-Hook
S钩

额定载荷 WLL(T)	破断拉力 B.L(T)	重量 Weight(KG)
1	4	1.2
2	8	1.5
3	12	1.8
5	15	3.5
8	32	7.7
10	40	11.6



● Eye Type Grab Hook
眼型翅钩

额定载荷 WLL(T)	破断拉力 B.L(T)	重量 Weight(KG)
1.12	4.48	0.14
2	8	0.24
3.2	12.6	0.65
5.4	21.2	1.4
8	32	2.2
12.5	50	4.6
15	60	8.2
21.2	84.8	9.8
31.5	126	19.5



● Swivel Hook
旋转钩

E 228 Y		3220 碳钢 3320CA1		重量 Weight (KG)
额定载 荷 WLL(T)	破断 拉力 B.L(T)	额定载 荷 WLL(T)	破断 拉力 B.L(T)	
1	4	0.75	3.75	0.45
2	8	1.5	7.5	1.2
3	12	2	10	1.35
5	20	3	15	2.2
7	28	5	25	4.8
11	44	7.5	37.5	7.5
15	60			10.6
22	88			21.4
30	120			32



● Clevis Large Opening Hook
80 级羊角大开口



额定载荷 WLL(T)	重量 Weight(KG)
1.1	1.1
2.5	2.5
5.3	2

● Straight Container Hook
80 级直型集装箱钩



额定载荷 WLL(T)	重量 Weight(KG)
12.5	4

● Swivel Selflocking Hook
80 级旋转自锁钩




额定载荷 WLL(T)	重量 Weight(KG)
1.12	0.71
2	1.1
3.15	2.0
5.3	4.0
8	7.3
12.5	11.6
15	16.0
21.2	21.5
31.5	79

● Eye Type Selflocking Hook
80 级眼型自锁钩



额定载荷 WLL(T)	重量 Weight(KG)
1.12	0.5
2	0.8
3.15	1.43
5.3	2.86
8	5.64
12.5	7.6
15	13
21.2	18
31.5	44.5

● Clevis Selflocking Hook
80 级自锁羊角安全钩



额定载荷 WLL(T)	重量 Weight(KG)
1.12	0.5
2	0.8
3.15	1.5
5.3	2.8
8	5.6
12.5	7.5
15	11.5
21.2	18.5
31.5	49.1

● Clevis Sling Hook With Safety Latch
80 级欧式羊角吊钩



额定载荷 WLL(T)	重量 Weight(KG)
1.12	0.3
2.0	0.55
3.15	0.96
5.3	1.52
8	3.43
12.5	6.73

● Clevis Forest Hook
80 级羊角森林钩



重量 Weight (KG)	额定载荷 WLL(T)	破断拉力 B.L(T)
0.413	1.12	4.48
0.413	2	8
0.92	3.15	12.6
1.75	5.3	21.2

● Sliding Eye Choke Hook
80 级滑眼钩



额定载荷 WLL(T)	重量 Weight (KG)
1.6	0.68
2	1.21
3	1.99
5	4.18

● Forged Barrel Hook
锻造挂桶钩



额定载荷 WLL(T)	重量 Weight(KG)
1	0.7
2	0.55
3	
5	

● Twist Eye Choke Hook
80 级眼型转脖钩



额定载荷 WLL(T)	重量 Weight(KG)
2	0.36
3.2	0.72
5.4	1.4
8.2	3.17
10	3.8
15.3	8.95

● Omega Link
80 级欧姆环



额定载荷 WLL(T)	重量 Weight(KG)
1.12	0.12
2.0	0.22
3.15	0.36
5.3	0.71
8	1.3
12.5	2.2

● Excavator Bucket Lifting Hook
80 级焊接钩



额定载荷 WLL(T)	重量 Weight(KG)
2	0.83
3	1.2
5	2.46
8	3.26
10	5.17

● Grade 80 Welded D-ring
80 级焊接 D 型环



额定载荷 WLL(T)	重量 Weight(KG)
1.12	0.4
2	0.47
3.15	0.69
5.3	1.46
8	2.5
15	5.79

● Duckbill Duckle Prefabricated Part Sling
鸭嘴扣预制件吊具



额定载荷 WLL(T)	重量 Weight(KG)
1-1.3	0.89
1.5-2.5	1.3
3-5	3.24
6-10	10.01
12-20	20.37
32	46.5

● Clevis Grab Hook
羊角抓钩



工作负荷 Workload (T)	链条规格 Chain specification		重量 Weight (KG)
	英寸 inch	mm	
1.63	1/4	6	0.20
2.45	5/16	8	0.37
3.40	3/8	10	0.49
4.54	7/16	12	0.74
5.78	1/2	13	1.07
8.62	5/8	16	1.94
12.25	3/4	19	2.95

● Clevis Hook With Safety Latch
G70 羊角滑钩



工作负荷 Workload (T)	链条规格 Chain specification		重量 Weight (KG)
	英寸 inch	mm	
1.5	1/4	6	0.23
2	5/16	8	0.38
3.15	3/8	10	0.6
3.75	7/16	12	0.9
5.3	1/2	13	1.34
7	5/8	16	2.2
11	3/4	19	4.8

● Clevis j Hook
J 型钩



工作负荷 Workload (T)	链条规格 Chain specification		重量 Weight (KG)
	英寸 inch	mm	
2.45	8	2.2	1.5
2.45	15	380	2.0

● Sheep Horn J-Shaped Hook
羊角 J 型钩



工作负荷 Workload (T)	链条规格 Chain specification		重量 Weight (KG)
	英寸 inch	mm	
2.11	8	202	1.24
2.11	15	381	1.50

● G80 Pear Shape Ring
80 级锻造梨型环



规格 Model	重量 Weight (KG)	额定载荷 WLL(T)	破断拉力 B.L./
3/8"	0.1	0.8	3.2
1/2"	0.25	1.3	5.2
5/8"	0.5	1.9	7.6
3/4"	0.9	2.7	10.8
7/8"	1.3	3.8	15.2
1"	2	4.9	19.6
1-1/8"	2.54	6	24
1-1/4"	3.9	7.6	30.4
1-3/8"	5.2	9.3	37.2
1-1/2"	6.5	10	40
1-3/4"	10.5	15	60
2"	14.5	20	80
2-1/2"	28.8	25	100



● G80 O-RING
80 级圆环

工作拉力 Working pull MLL	重量 Weight(KG)
1.1	0.2
1.5	0.45
2.2	0.66
2.5	0.84
3.5	1.2
3.5	1.68
4.5	1.8
6.5	2.8
9	3.5
9	4.5
9	5.5
10	5
10	6.5
10	7.9
16	10.3
20	19.4

● G80 Chain Master link
80 级美式强力环



额定载荷 WLL(T)	规格 Specifications	重量 Weight (KG)
2	1/2	0.44
3	5/8	0.7
4.75	3/4	0.92
6.4	7/8	1.5
8	7/8	1.55
11	1	2
16	1-1/4	4
21.7	1-1/2	7.2
28.4	1-3/4	11.3
35	2	16.7
45	2-1/4	23.2
50	2-1/2	29.8
60	2-3/5	39.2
70	2-4/5	45
80	3-1/4	58
100		66.5
120		76
150		88
160		103

● G80 Master Link Assembly
80 级美式强力子母环



额定载荷 WLL(T)	规格 Specifications	重量 Weight (KG)
4.7	3/4	1.6
6.4	7/8	2.1
8	7/8	2.8
11	1	4
16	1-1/4	7.1
21.7	1-1/2	13.3
28.4	1-3/4	18.9
35	2	27.8
45	2-1/4	44.5
50	2-1/2	49
60	2-4/5	65.6
80	3	1.5
100	3-1/4	139
120	3-1/2	161

● Oilfield Rotary Hook
油田旋转钩



额定载 荷 WLL(T)	卸扣载荷 WLL OF SHACKLE	吊钩载荷 WLL OF HOOK	重量 Weight (KG)
2	3.25T	2T	3.8
3	4.75T	3.15T	6.8
5	6.5T	5.3T	13
8	8.5T	8T	24

● Universal Vertical Hook
● Universal Vertical Hook (Double Ring)
万向垂直钩



额定载荷 WL(T)
1
2
3
5
8
10

● Gravity Rotation Ring
重力旋转环



规格 Model (Ton)	长度 Length (Mm)	外径 External Diameter (Mm)	孔径 Bore Diameter (Mm)	孔中心距离 Hole Center Distance (Mm)	顶部厚度 Top Thickness (Mm)	重量 Weight (KG)
1T	185	50	20	138	18	1.75
2T	209	54	22	160	20	2.35
3T	240	62	30	180	25	3.67
5T	294	78	32	216	30	6.8
10T	405	108	50	297	50	18.1
15T	510	126	60	390	55	32.5
20T	540	138	60	414	60	41
25T	626	147	81	465	81	

● G80 Connecting Link
80 级双环扣



额定载荷 WLL(T)	重量 Weight (KG)
1.12	0.08
1.5	0.145
2	0.146
2	0.16
3.15	0.30
5.3	0.65
8	1.15
10	1.84
12.5	2.1
15	2.87
21.2	4.5
31.5	8.21



● G80 Sling Connecting Link
80 吊带双环扣

额定载荷 WLL(T)	重量 Weight (KG)
1.12	0.2
2.0	0.3
3.15	0.68
2.3	1.47
8	2.3
12.5	3.3
15	6.89
21.2	10.62
31.5	18.92

● G80 D 型环
G80 D Ring



重量 Weight (KG)	额定载荷 WLL(T)	破断拉力 B.L(T)
0.3	2.5	10
0.5	4	16
0.7	6.5	26
1	8	32

● Grade 80 A-Ring
80 级 A 型环



额定载荷 WLL(T)	重量 Weight (KG)
2100	0.46
3500	1.30
7100	1.89

● Alloy Steel Clevis X Shackle
合金钢双头 X 型扣



额定载荷 WLL(T)	重量 Weight (KG)
1.18	0.17
2.45	0.37
3.17	0.57
4.17	0.71
7.94	1.3

● Alloy Steel Clevis H Shackle
合金钢 H 扣



额定载荷 WLL(T)	重量 Weight (KG)
2.1	0.21
3	0.348
5.1	0.726
7.48	1.05

- G80 Clevis Pear Ring
80 级羊角梨型环



额定载荷 WLL(T)	重量 Weight (KG)
2	0.53
3.15	0.74
5.3	1.76
8	2.8
10	3.5

- Grade 80 Chain Adjuster
80 级链条调节器



额定载荷 WLL(T)	重量 Weight (KG)
1.12	0.17
2	0.37
3.15	0.97
5.3	2.01
8	3.32
12.5	6.2
15	8.5

- Ratchet Tightener
棘轮式拉紧器



棘轮式拉紧器 1T-5.8T Ratchet type tensioner 1T-5.8T		
规格型号 Model	额定载荷 WLL(T)	重量 Weight (KG)
1/4-5/16	1t	1.8
5/16-3/8	2.4t	4.6
3/8-1/2	4t	5.2
1/2-5/8	5.8t	6.8

(注: 以上数据均为人工测量, 误差 <5%, 如需更大的尺寸, 可支持定制)

- Lever Tightener
杠杆式拉紧器



杠杆式拉紧器 1T-5T Lever type tensioner 1T-5T		
规格型号 Model	额定载荷 WLL(T)	重量 Weight (KG)
1/4-5/16	1t	1.5
5/16-3/8	2.4t	3.7
3/8-1/2	4t	6
1/2-5/8	5t	9.6

- U.S. Type Drop Forged Wire Rope Clip
美标锻造钢丝绳卡头



型号 Part No.	尺寸 Size inch	净重 NW kg/100pcs	型号 Part No.	尺寸 Size inch	净重 NW Kg/100Pcs
RUFC0108	1/8	5.00	RUFC0708	7/8	240.00
RUFC0316	3/16	9.00	RUFC1000	1	250.00
RUFC0104	1/4	18.00	RUFC1108	1-1/8	310.00
RUFC0516	5/16	30.00	RUFC1104	1-1/4	460.00
RUFC0308	3/8	42.00	RUFC1308	1-3/8	520.00
RUFC0716	7/16	70.00	RUFC1102	1-1/2	590.00
RUFC0102	1/2	75.00	RUFC1508	1-5/8	730.00
RUFC0916	9/16	100.00	RUFC1304	1-3/4	980.00
RUFC0508	5/8	100.00	RUFC2000	2	1340.00
RUFC0304	3/4	150.00	RUFC2104	2-1/4	1570.00

MEET FEDERAL SPECIFICATION FF-C-450 TYPE I CLASS I
生产标准 FEDERAL FF-C-450 I 型 I 级

● 组合索具 Lifting Chain Sling




Product Parameters

型号 Model	强力环 子母环 Strong ring sub-mother ring		双环扣 Double Duckle		吊钩 Cliver		链条 Chain		
	型号 / 吨 Model/ Ton	型号 / 吨 Model/ Ton	数量 Quantity	型号 / 吨 Model/ Ton	数量 Quantity	型号 / 吨 Model/ton	米数 Meters	条数 Number of pieces	直径 Diameter
1T 1M 1 Legs	2		1	1.2	1	1.2	1	1	6
1T 2M 2 Legs	2		2	1.2	2	1.2	1	2	6
2T 0.5 M 2 Legs	2		2	1.2	2	1.2	0.5	2	6
2T 1 M 2 Legs	2		2	1.2	2	1.2	1	2	6
2T 1 M 4 Legs		4.7	4	1.2	4	1.2	1	4	6
2T 1.5 M 4 Legs		4.7	4	1.2	4	1.2	1.5	4	6
3T 1.5 M 4 Legs		4.7	4	2	4	1.2	1.5	4	6
3T 1 M 2 Legs	3		2	2	2	2		2	8
3T 1 M 4 Legs		4.7	4	1.2	4	1.5	1	4	6
3T 2 M 2 Legs	3		2	2	2	2	2	2	8
5T 1 M 2 Legs	4.7		2	3.15	2	3.15	1	2	10
5T 1 M 4 Legs		4.7	4	2	4	2	1	4	8
5T 1.5 M 4 Legs		4.7	4	2	4	2	1.5	4	8
5T 2 M 2 Legs	4.7		2	3.15	2	3.15	2	2	10
6.4T 1 M 2 Legs	6.4		2	3.15	2	3.15	1	2	10
6.4T 1 M 4 Legs		6.4	4	2	4	2	1	4	8
6.4T 1.5 M 4 Legs		6.4	4	2	4	2	1.5	4	8
6.4T 2 M 4 Legs		6.4	4	2	4	2	2	4	8
8T 1 M 2 Legs	8		2	5.4	2	5.3	1	2	12
8T 1.5 M 4 Legs		8	4	2	4	2	1.5	4	8
11T 1 M 2 Legs	11		2	5.4	2	5.3		2	14
11T 1 M 4 Legs		11	4	3.15	4	3.15	1	4	10
16T 1 M 2 Legs	16		2	8	2	8.2	1	2	16
16T 2 M 4 Legs		16	4	5.4	4	5.3	2	4	13
21T 1 M 4 Legs	21.7		4	5.4	4	5.3	1	4	14
21T 2 M 4 Legs		21.7	4	5.4	4	5.3	2	4	14
30T 1 M 2 Legs	35		2	15	2	15		2	24

● G80 花兰 G80 Turnbuckles

Product Parameters

规格 Model	C (Mm)	D (Mm)	S (Mm)	L (Mm)	L1 (Mm)	自由行程 Free Travel(Mm)	包装数量 Package Quantity (Pcs)	千件重量 Weight of 1000 pieces (Kg)
M4	9.3	5	7.5	60.0	107.0	39.0	100	35.4
M5	9.7	5	7.5	73.0	124.0	59.0	100	39.0
MG	10.5	6	9.6	91.0	150.0	64.0	50	76.9
M8	12.5	8	9.6	122.8	192.0	96.0	20	133.2
M10	15	10	11.3	150.0	240.0	115.0	10	262.0
M12	17.5	12	18.4	197.0	303.0	163.0	10	478.0
M14	22.4	13.4	17.6	221.0	350.0	185.0	10	700.6
M16	26.5	16	21.8	248.0	385.0	193.0	2	1006.0
M20	30.1	20	22.1	299.0	465.0	232.0	2	1958.0
M24	24.9	24	23.7	356.0	531.0	269.0	2	3390.0




G80 Turnbuckles type OC

规格 Model	C (Mm)	D (Mm)	L (Mm)	L1 (Mm)	自由行程 Free Travel(Mm)	包装数量 Package Quantity (Pcs)	千件重量 Weight of 1000 pieces (Kg)
M4	9.3	5	60.0	107.0	39.0	100	35.4
M5	9.7	5	73.0	124.0	59.0	100	39.0
MG	10.5	6	91.0	150.0	64.0	50	76.9
MB	12.5	8	122.8	192.0	96.0	20	133.2
M10	15	10	150.0	240.0	115.0	10	262.0
M12	17.5	12	197.0	303.0	163.0	10	478.0
M14	22.4	13.4	221.0	350.0	185.0	10	700.6
M16	26.5	16	248.0	385.0	193.0	2	1006.0
M20	30.1	20	299.0	465.0	232.0	2	1958.0
M24	24.9	24	356.0	531.0	269.0	2	3390.0




G80 Turnbuckles type OO

规格 Model	D (Mm)	S (Mm)	L (Mm)	L1 (Mm)	自由行程 Free Travel(Mm)	包装数量 Package Quantity (Pcs)	千件重量 Weight of 1000 pieces (Kg)
M4	5.0	7.5	60.0	107.0	39.0	100	35.0
M5	5.0	7.5	73.0	124.0	59.0	100	39.0
M6	6.0	9.6	91.0	150.0	64.0	50	76.0
M8	8.0	9.6	122.8	192.0	96.0	20	130.0
M10	10.0	11.3	150.0	240.0	115.0	10	261.0
M12	12.0	18.4	197.0	303.0	163.0	10	475.0
M14	12.4	13.4	176.0	350.0	185.0	10	701.6
M16	16.0	21.8	248.0	385.0	193.0	2	999.0
M20	20.0	22.1	299.0	465.0	232.0	2	1950.0
M24	24.0	23.7	356.0	531.0	269.0	2	3380.0



G80 Turnbuckles type CC

规格 Model	A (Mm)	B (Mm)	D (Mm)	L1 (Mm)	L2 (Mm)	自由行程 Free Travel(Mm)	包装数量 Package Quantity (Pcs)	千件重量 Weight of 1000 pieces (Kg)
M5	9.0	81	5.0	180.0	122.0	58.0	10	48
M6	9.0	90	5.0	210.0	137.0	73.0	10	84
MB	10.0	110	6.0	250.0	155.0	95.0	10	122
M10	11.0	120	8.0	275.0	178.0	97.0	10	206
M12	16.0	150	10.0	350.0	237.0	113.0	10	359
M16	15.0	190	14.0	450.0	280.0	170.0	2	840
M20	24.0	222	15.0	525.0	350.0	175.0	2	1490



G80 Turnbuckles type UII

● 单轮开口滑车 Single Wheel Pulley With Hook
单轮吊环滑车 Single Wheel Pulley With Ring



Product Parameters

规格 Model	额定起重量 Rated Load (T)	试验载荷 Test Load(T)	钢丝绳直径 Diameter of Steel Rope (Mm)		轮槽直径 Dia of Wheel (Mm)	机体重量 Weight(Kg)
			适用 Match	最大 Max		
HQG(L)K1-0.5	0.5	8	62	7.7	71	175
HQD(L)K1-0.5						
HQG(L)K1-1	1	16	7.74	11	85	325
HQD(L)K1-1						
HQG(L)K1-2	2	32	11	14	112	5
HQD(L)K1-2						
HQG(L)K1-3.2	3.2	51.2	12.5	15.5	132	105
HQD(L)K1-3.2						
HQG(L)K1-5	5	80	15.5	18.5	160	19
HQD(L)K1-5						
HQG(L)K1-8	8	128	20	23	210	352
HQD(L)K1-8						
HQGA1-10	10	160	23	24.5	240	505
HQD(L)K1-10						
HQG(L)K1-16	16	224	28	31	315	113.5
HQG(L)K1-20						
	20	280	31	35	355	162.2

注：HQ- 滑车系列；K- 开口型滑车；L- 特环型滑车；G- 吊钩型滑车；D- 吊环型滑车 Note: HQ- pulley; K- open type; L- close type 闭口滑车 G- hook type; D- ring type


● 多轮吊钩滑车 Multi Wheels Pulley With Hook
多轮吊环滑车 Multi Wheels Pulley With Ring



Product Parameters


名称 Description	规格 Model	额定起重量 Rated Load (T)	试验载荷 Test Load (T)	钢丝绳直径 Diameter of Steel Rope (Mm)		轮槽直径 Dia of Wheel (Mm)	机体重量 Weight (Kg)
				适用 Match	最大 Max		
4 轮吊环型滑车 Four wheels Pulley with Ring	HQD4-8	8	128	11	14	112	29.36
	HQD4-10	10	160	12.5	15.5	132	41.46
	HQD4-16	16	224	15.5	18.5	150	76.23
	HQD4-20	20	280	17	20	180	84
	HQD4-32	32	448	23	24.5	240	196.23
5 轮吊环型滑车 Five wheels Pulley with Ring	HQD5-20	20	280	15.5	18.5	160	91.5
	HQD6-32	32	448	20	23	210	151.8
	HQD5-50	50	700	28	31	316	347.9
6 轮吊环型滑车 Six wheels Pulley with Ring	HQD5-20	20	280	15.5	18.5	160	91.5
	HQD6-32	32	448	20	23	210	151.8
	HQD5-50	50	700	28	31	316	347.9
8 轮吊环型滑车 Eight wheels Pulley with Ring	HQD8-80	80	1040	31	35	355	516.59
	HQD8-100	100	1300	31	35	355	691.3
	HQD8-160	160	2080	31	35	355	1137.4
10 轮吊环型滑车 Ten wheels Pulley with Ring	HQD10-200	200	2500	34	38	400	1360
	HQD10-320	320	4000	40	43	450	2974

● 单轮吊环电力滑车
Single-Wheel Lifting Ring Electric Pulley

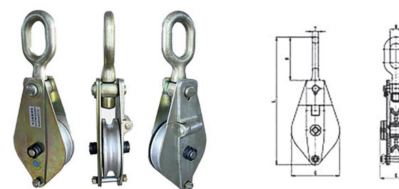

Product Parameters

额定载荷 Rated load WLL (T)	滑轮直径 Pulley Diameter (Mm)	钢丝绳直径 Diameter of Steel Rope (Mm)	尺寸 Size(Mm)						重量 Weight (Kg)
			T	E	G	B	R	L	
1	100	g-10	14	73	108	97	26	277	2.9
2	118	10-11	16	76	124	106	29	336	3.4
3	136	13-15	19	88	139	130	33	387	6.4
5	152	15-16	22	96	154	160	4	445	7.4

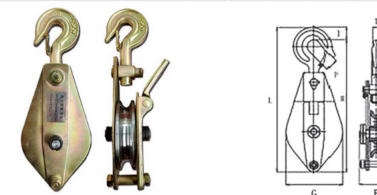

Product Parameters

额定载荷 Rated Load WLL (T)	滑轮直径 Pulley diameter (Mm)	钢丝绳直径 Diameter of steel rope (Mm)	尺寸 Size(Mm)						重量 Weight (Kg)
			T	E	G	B	R	L	
1	100	9-10	18	73	108	25	253	23	2.9
2	118	10-11	20	76	124	32	301	23	3.4
3	136	13-15	27	88	139	37	346	33	6.4
5	152	15-16	28	96	154	38	502	33	7.4